2350 Zanker Road
San Jose, CA 95131
Phone: 408 597 3435
Fax: 408 597 3437

Service Bulletin

techsupport@globalvr.com http://service.globalvr.com

Priority Level: Low — Useful Information		
Attention:	All Service Personnel	**Bulletin:** SB-032 **Date:** 2/7/2007
Products:	*Need for Speed*™ **Underground**	
Issue:	Shifters need adequate slack in micro switch wires.	

Symptom: Some six-speed shifters were shipped with wires tied too tightly near the micro switches. This can cause the wires to the *Right* micro switch to break, causing the shifter to malfunction in gears 5 and 6.

Solution: Perform the steps below to check the shifter and fix the problem, if found.

1. Remove the four (4) T-10H Torx® Security screws from the top of the shifter assembly and carefully lift the shifter assembly out of the housing.
2. Inspect the wires while moving the shifter left to right, and make sure there is some slack in the wires between the cable tie and the switch terminals.
3. If necessary, snip the cable tie and re-tie it so that there is adequate slack in the wire.
4. If the wire has broken, splice it to a new spade connector and make sure there is adequate slack in the wire when you connect it to the micro switch.

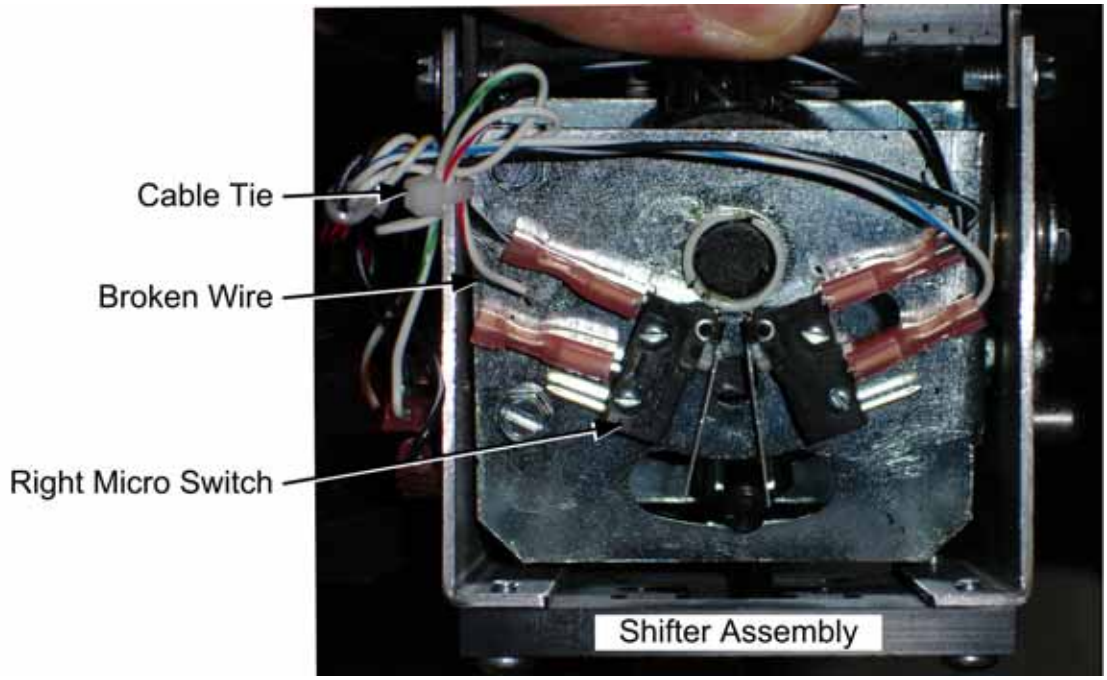

Shifter Assembly with Broken Micro Switch Wire

© 2007 Global VR, Inc. All Rights Reserved. Need for Speed and EA are trademarks or registered trademarks of Electronic Arts Inc. in the U.S. and/or other countries. GLOBAL VR and the GLOBAL VR logo are registered trademarks of Global VR, Inc. All other trademarks are the properties of their respective owners.