

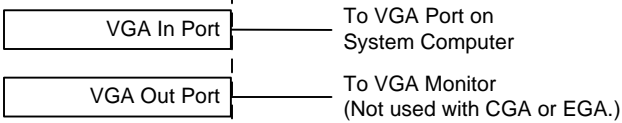

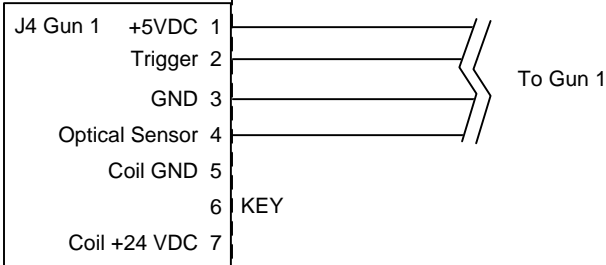
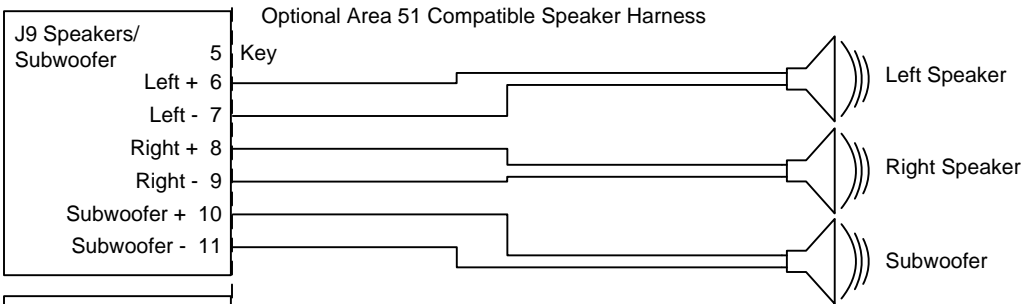
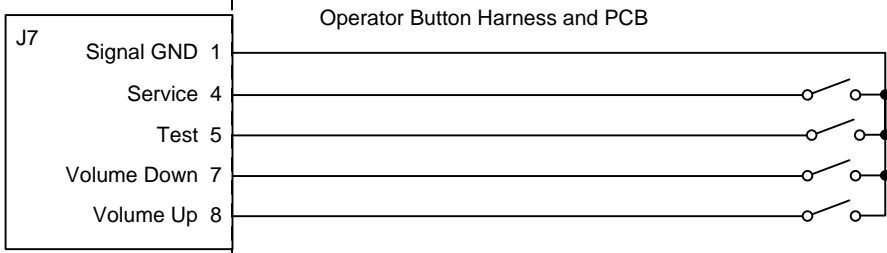


USB2GUN PCB



America's Army Kit
Detailed I/O Wiring Diagram
© 2012 GLOBAL VR Inc.

JAMMA Connector

SOLDER SIDE

GND	A
GND	B
+5V	C
+5V	D
-5V	E
+12V	F
Key	H
Not Used	J
Not Used	K
L Speaker -	L
R Speaker -	M
Video Green	N
Video Sync	P
Service	R
Not Used	S
Coin 2	T
Player 2 Start	U
Not Used	V
Not Used	W
Not Used	X
Not Used	Y
Not Used	Z
Not Used	Aa
Not Used	Ab
Not Used	Ac
Not Used	Ad
GND	Ae
GND	Af

COMPONENT SIDE

GND	1
GND	2
+5V	3
+5V	4
-5V	5
+12V	6
Key	7
Coin Counter 1	8
Not Used	9
L Speaker +	10
R Speaker +	11
Video Red	12
Video Blue	13
Video GND	14
Test	15
Coin 1	16
Player 1 Start	17
Not Used	18
Not Used	19
Not Used	20
Not Used	21
Not Used	22
Not Used	23
Not Used	24
Not Used	25
Not Used	26
GND	27
GND	28