

Setting the Computer BIOS (CMOS), MSI H61M-P32 Motherboard

O40-BIOS-H61-P32 Rev. A

This procedure applies only to systems with the MSI H61M-P32 Motherboard. If your System Computer has a different motherboard, check <http://service.globalvr.com> for updated information.

If you are comfortable using the CMOS Setup Utility, connect a keyboard to the computer and press the **Delete (Del)** key during boot to run the utility. Press **F6** to Load Optimized Defaults and press **Y** to confirm, and then change the settings shown in the table below. For more help, refer to the detailed instructions that follow.

Menu	Submenu (If Applicable)	Item	Setting
Press F6 to Load BIOS Defaults			
Main Menu		System Date	Set to Current Date
		System Time	Set to Local Time
Advanced	USB Configuration	Legacy USB Support	Disabled
	Intel(R) Smart Connect Configuration	Intel(R) Smart Connect Configuration	Disabled
	Power Management Setup	Restore after AC Power Loss	Power On
Boot		Full Screen Logo Display	Disabled
		1st Boot	CD/DVD: ATAPI*
		2nd Boot	Hard Disk

***Important:** In the Boot Menu, **do not** select the setting that says CD/DVD but does not say ATAPI.


Important: Your screens may not look exactly like the screens shown in this document, and some settings shown in the illustrations may be different from your system.

Do not change any settings that are not specifically described in this document.




Note: Use the left and right arrow keys (←→) to move between the menus listed at the top of the screen, and the up and down arrow keys (↑↓) to move up and down between menu items. Use the + and – keys to change settings for highlighted items.

1. Press the **Delete (Del)** key during boot. The System Setup Utility Main Menu will appear.
2. Press the **F6** key to Load Optimized Defaults, and then press **Y** to confirm. Now change the BIOS settings described on the following pages.


3. Use the left and right arrow keys (→←) to select **Main Menu** if not already selected.
4. Use the up and down arrow keys (↑↓) as needed to select **System Date**. The month will be highlighted.
5. Use the + and – keys to set the month. Press the **Tab** key to move to the day, and set it the same way. Repeat for the year.
6. Use the up and down arrow keys (↑↓) to select **System Time**, and then use the +, –, and **Tab** keys to set the time the same way you set the date.
7. Use the left and right arrow keys (→←) to select the **Advanced** menu.
8. Use the up and down arrow keys (↑↓) to select **USB Configuration**, and press **Enter** to open the submenu.

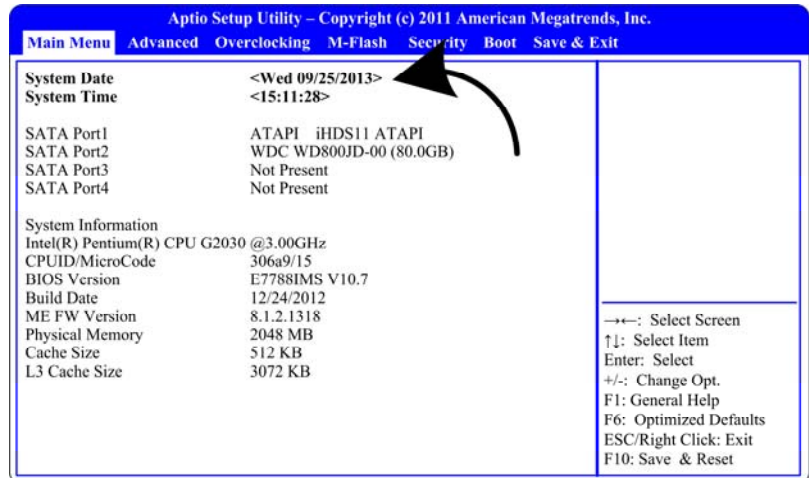

9. Use the up and down arrow keys (↑↓) to select **Legacy USB Support**, and then use the (+-) keys to set it to **Disabled**.
10. Press **ESC** to return to the previous menu.
11. Use the up and down arrow keys (↑↓) to select **Intel(R) Smart Connect Configuration**, and press **Enter** to open the submenu.
12. Use the (+-) keys to change the setting for **Intel(R) Smart Connect Configuration** to **Disabled**.
13. Press **ESC** to return to the previous menu.

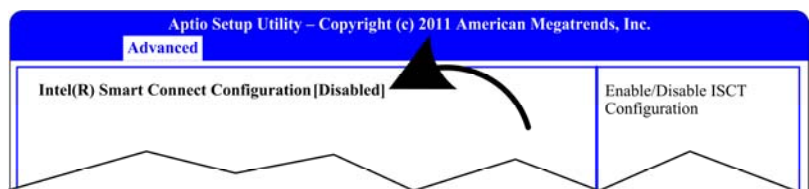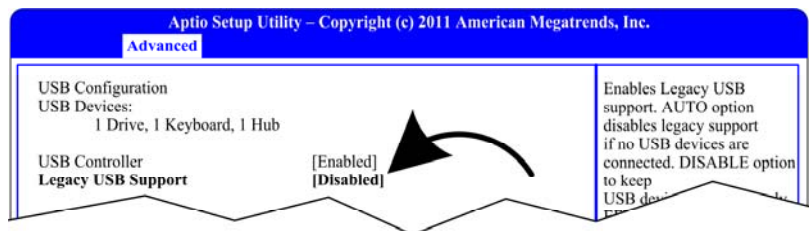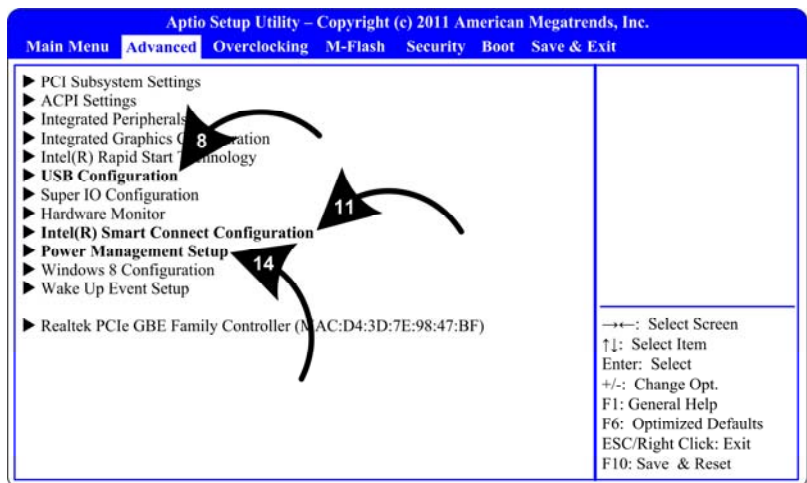


14. Use the up and down arrow keys (↑↓) to select **Power Management Setup**, and press **Enter** to open the submenu.
15. Use the up and down arrow keys (↑↓) to select **Restore after AC Power Loss**, and then use the (+-) keys to change the setting to **Power On**.

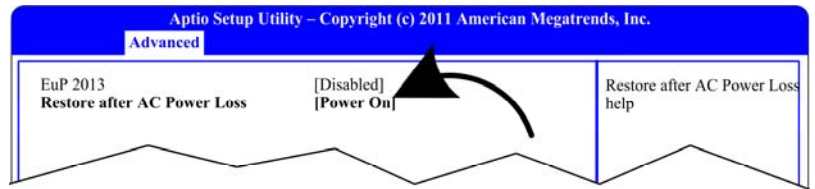

16. Press **ESC** to return to the previous menu.
17. Use the left and right arrow keys (→←) to select the **Boot** menu.

18. Use the up and down arrow keys (↑↓) as needed to select **Full Screen Logo Display**, and then use the (+-) keys to change the setting to **Disabled**.
19. Use the up and down arrow keys (↑↓) to select **1st Boot**, and then use the (+-) keys to change the setting to **CD/DVD: ATAPI**.

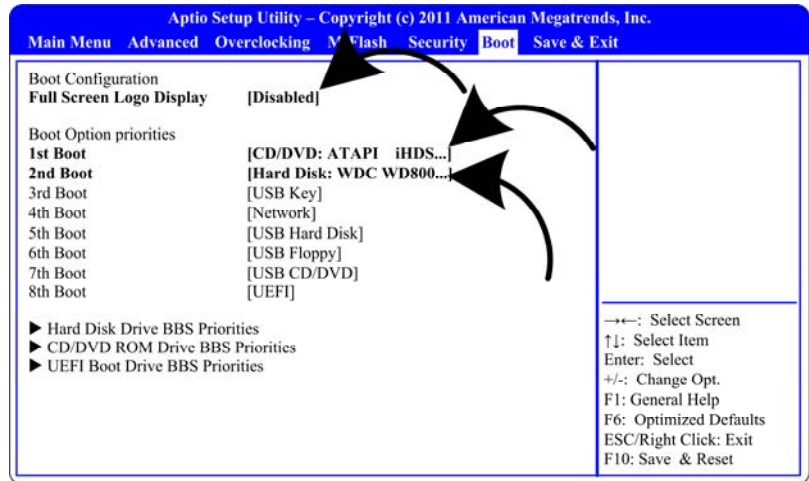

Important: Do not select the setting that says only "CD/DVD." Be sure to select **CD/DVD: ATAPI**.

20. Use the up and down arrow keys (↑↓) to select **2nd Boot**, and then use the (+-) keys to change the setting to **Hard Disk**.

Note: Boot order for remaining devices does not matter.

21. Now that all settings are correct, press **F10**. The following prompt will appear:



22. Make sure **Yes** is highlighted (use the arrow keys to highlight if necessary) and press **Enter**.