




BIOS (CMOS) SETTINGS

Note: These settings are for Cabinets Manufactured in 2006 and later.

Follow the steps below to check or change the BIOS settings for the KICK-IT PRO computer. Change only the settings described in this section. The other settings should not affect the game.

1. Power OFF the KICK-IT PRO cabinet and connect a PS/2 keyboard to the computer.
2. Power ON cabinet and press the **Delete** key on the keyboard as the computer boots. The CMOS Setup Utility screen will appear, as shown below.

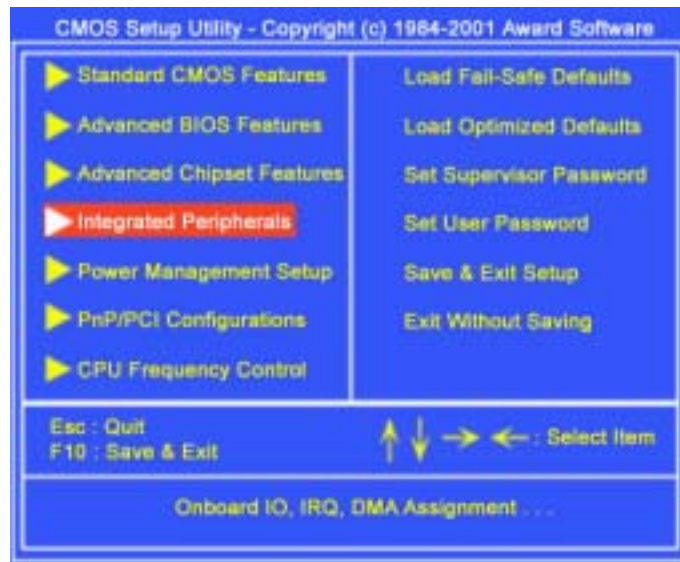

3. Use the arrow keys to select a settings menu from the left side of the screen, and press the **Enter** key to enter the menu.
4. Use the arrow keys to change the settings shown in the tables below, as necessary. When finished, press the **F10** key to save your changes.

Standard CMOS Features

A: Drive	None
B: Drive	None
Halt ON	NO ERRORS

Advance BIOS Features

First Boot Device	CD-ROM
Second Boot Device	HDD-0
Third Boot Device	Disabled
Boot Other Device	Enabled

Advance Chipset Features

Video BIOS Cacheable	Enabled
----------------------	---------

Integrated Peripherals

Onboard FDC Controller	Disabled
Onboard Serial Port 1	AUTO
Onboard Serial Port 2	Disabled
Parallel Port Mode	EPP
PWRON After PWR-FAIL	ON
Game Port Address	Disabled
Midi Port Address	Disabled

PNP / PCI Configuration

Resources Controlled by	Auto ESCD
-------------------------	-----------