




BIOS (CMOS) SETTINGS

Note: These settings are for Cabinets Manufactured in 2006 and later.

Follow the steps below to check or change the BIOS settings for the KICK-IT PRO computer. Change only the settings described in this section. The other settings should not affect the game.

1. Power OFF the KICK-IT PRO cabinet and connect a PS/2 keyboard to the computer.
2. Power ON cabinet and press the **Delete** key on the keyboard as the computer boots. The CMOS Setup Utility screen will appear, as shown below.

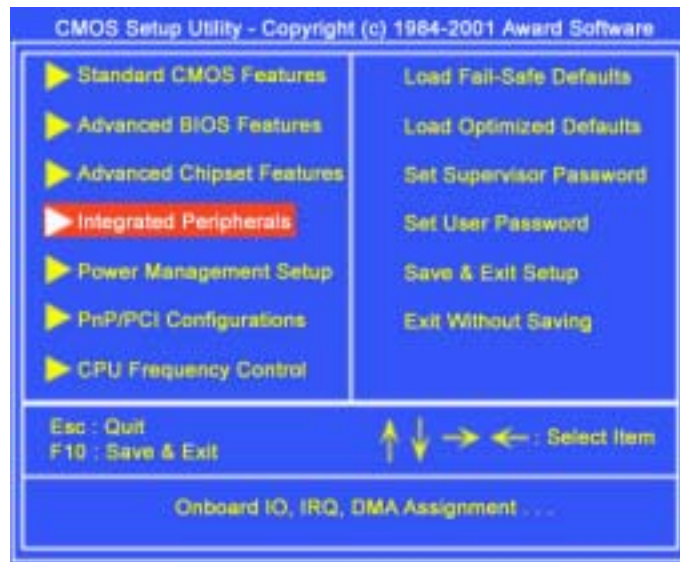

3. Use the arrow keys to select a settings menu from the left side of the screen, and press the **Enter** key to enter the menu.
4. Use the arrow keys to change the settings shown in the tables below, as necessary. When finished, press the **F10** key to save your changes.

Standard CMOS Features

| | |
|----------|-----------|
| A: Drive | None |
| B: Drive | None |
| Halt ON | NO ERRORS |

Advance BIOS Features

| | |
|--------------------|----------|
| First Boot Device | CD-ROM |
| Second Boot Device | HDD-0 |
| Third Boot Device | Disabled |
| Boot Other Device | Enabled |

Advance Chipset Features

| | |
|----------------------|---------|
| Video BIOS Cacheable | Enabled |
|----------------------|---------|

Integrated Peripherals

| | |
|------------------------|----------|
| Onboard FDC Controller | Disabled |
| Onboard Serial Port 1 | AUTO |
| Onboard Serial Port 2 | Disabled |
| Parallel Port Mode | EPP |
| PWRON After PWR-FAIL | ON |
| Game Port Address | Disabled |
| Midi Port Address | Disabled |

PNP / PCI Configuration

| | |
|-------------------------|-----------|
| Resources Controlled by | Auto ESCD |
|-------------------------|-----------|