

Setting the Computer BIOS (CMOS)


This procedure applies only to the Gigabyte GA-945GM-S2 Motherboard.

If you are comfortable using the CMOS Setup Utility, press the **DEL** key during boot to run the Utility, select **Load Optimized Defaults** from the Main Menu, and then change the settings shown in the table below. For more help, refer to the detailed instructions that follow.

Menu	Item	Setting
Standard CMOS Features	Drive A	None
	Halt On	No Errors
Advanced BIOS Features	Hard Disk Boot Priority	WDC-WD400BB-IJJHC0 (Note: Description may vary.)
	First Boot Device	CDROM
	Second Boot Device	Hard Disk
	Third Boot Device	Disabled
Integrated Peripherals	USB Controller	Enabled
	USB 2.0 Controller	Disabled
	USB Keyboard Support	Enabled
	USB Mouse Support	Enabled
	Legacy USB Storage Detect	Enabled
	On Chip SATA	Disabled
Power Management Setup	AC Back Function	Full On
PC Health Status	CPU Smart FAN Control	Disabled


Important: Your screens may not look exactly like the screens shown below, and some settings shown on the screens pictures may be different from your system. **Do not change any settings that are not specifically described in this document.**

1. Press the **DEL** key during boot. The CMOS Setup Utility Main Menu will appear:
2. Use the Arrow keys (↑↓→←) to select **Load Optimized Defaults**, and press **Enter**.
Press **Y** and **Enter** when prompted to confirm the change.
3. Use the Arrow keys to highlight **Standard CMOS Features**, and then press **Enter**.

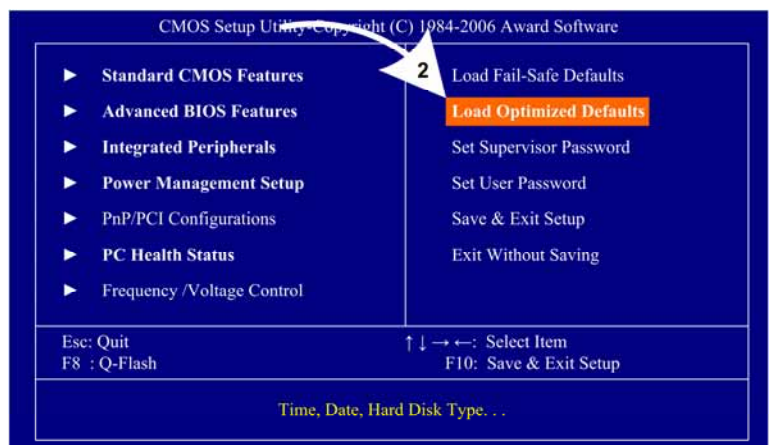

4. A screen similar to the following will appear:
5. Use the Arrow keys to highlight the setting for **Drive A** and press **Enter**. Use the **Page Up** and **Page Down** keys to change the setting to **None**.
6. Change the setting for **Halt On** to **No Errors** the same way.

Press **ESC** to go back to the Main Menu.

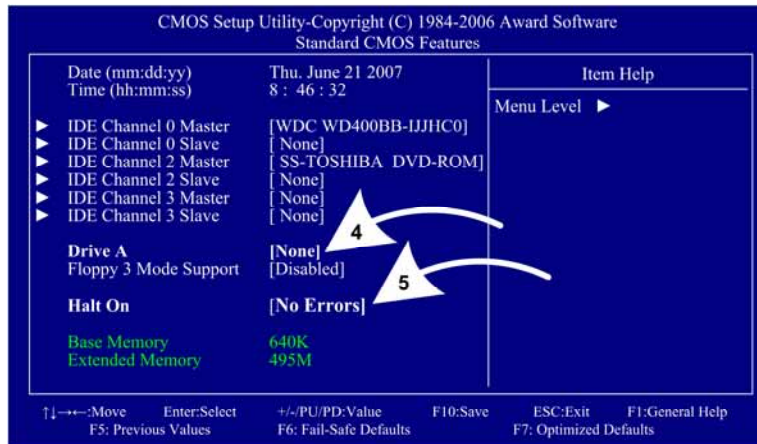


7. Now use the Arrow keys to highlight **Advanced BIOS Features** and press **Enter**. A screen similar to the following will appear:

8. Use the Arrow keys to highlight the setting for **Hard Disk Boot Priority** and press **Enter**.

9. In the next screen, use the arrow keys to select the Hard Drive (it will look something like WDC-WD400BB-IJHC0), and use the + key to move it to the top of the list.

10. Use the Arrow keys to highlight the setting for **First Boot Device** and press **Enter**.

Use the **Page Up** and **Page Down** keys to change the setting to **CDROM** or **DVDROM**.

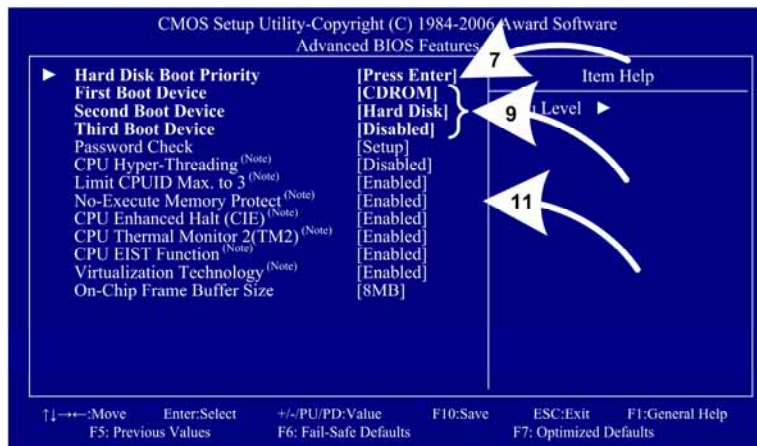


11. Set **Second Boot Device** to **Hard Disk** and **Third Boot Device** to **Disabled** the same way. Press **ESC** to go back to the Main Menu.

12. Now use the Arrow keys to highlight **Integrated Peripherals** and press **Enter**. A screen similar to the following will appear:


13. Change the following settings:

- On-Chip SATA Mode [Disabled]
- USB Controller [Enabled]
- USB 2.0 Controller [Disabled]
- USB Keyboard Support [Enabled]
- USB Mouse Support [Enabled]
- Legacy USB storage detect [Enabled]

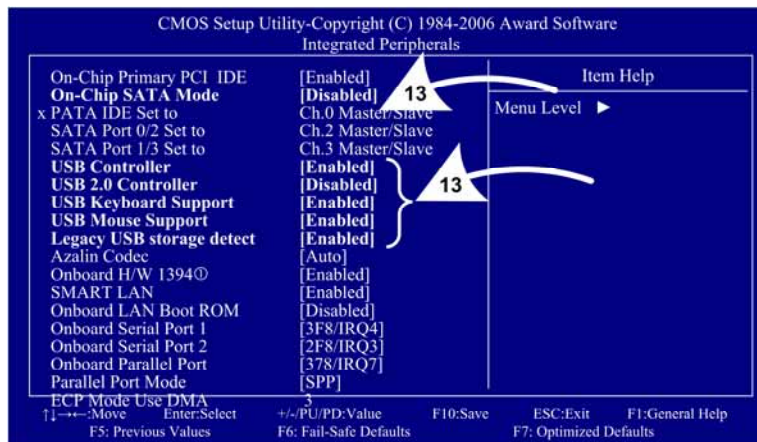


14. Now use the Arrow keys to highlight **Power Management Setup** and press **Enter**. A screen similar to the following will appear:

15. Use the Arrow keys to highlight the setting for **AC Back Function** and press **Enter**.
Use the **Page Up** and **Page Down** keys to change the setting to **Full-On**.

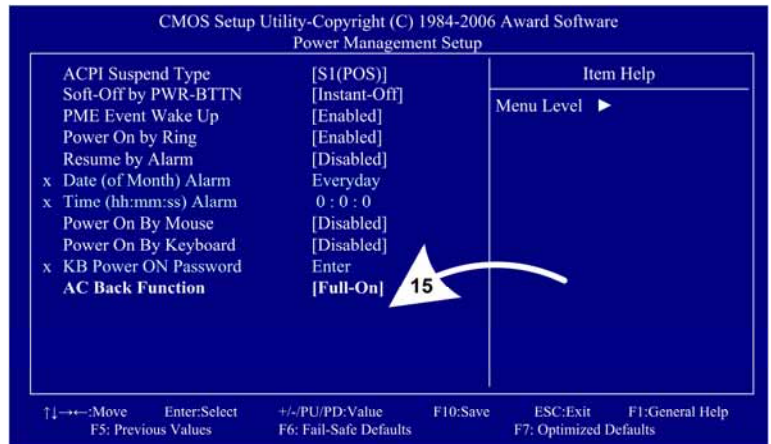

16. Now use the Arrow keys to highlight **PC Health Status** and press **Enter**. A screen similar to the following will appear:

17. Use the Arrow keys to highlight the setting for **CPU Smart FAN Control** and press **Enter**.
Use the **Page Up** and **Page Down** keys to change the setting to **Disabled**.

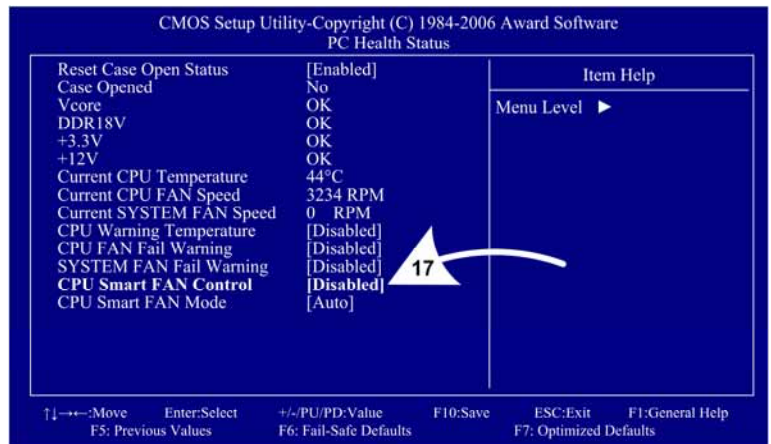

18. Now that all settings are correct, press F10. The following prompt will appear:

Save to CMOS and EXIT (Y/N) Y

19. Make sure "Y" shows at the end of the prompt (use the arrow keys to select, if necessary), and press **Enter** to save the settings and exit.