

BIOS (CMOS) Settings for Asus P5KPL-CM Motherboard

This procedure applies to the Asus **P5KPL-CM** Motherboard. If your system has a different motherboard, check <http://service.globalvr.com> for updated information.


If you are comfortable using the BIOS Setup Utility, connect a keyboard to the computer and press the **DEL** key during boot to run the Utility. Select **Load Setup Default** from the **Exit** Menu first, and then check all of the settings shown in the table below. For more help, refer to the detailed instructions that follow.

Menu	Submenu (if applicable)	Item	Setting
Exit		Load Setup Default	<i>(Not applicable)</i>
Main		System Time	<i>(Set to local time)</i>
		System Date	<i>(Set to current date)</i>
		Legacy Diskette A:	Disabled
		Primary IDE Master	WDC WD400BB
		Primary IDE Slave	Sony DVD-ROM
Advanced	CPU Configuration	Intel(R) SpeedStep(tm) Tech	Disabled
Boot	Boot Device Priority	1st Boot Device	DVD ROM or CD ROM
		2nd Boot Device	HDD
		3rd Boot Device	Disabled
	Boot Settings Configuration	Wait for F1 if Error	Disabled
Power	APM Configuration	Restore on AC Power Loss	Power On
	Hardware Monitor	CPU Q-Fan Control	Disabled <i>(default setting)</i>


Important: Your screens may not look exactly like the screens shown in this document, and some settings shown in the pictures may be different from your system.

Do not change any settings that are not specifically described in this document.

1. Power off the game and connect a keyboard to the computer. Power on and press the **DEL** key during boot. The BIOS Setup Utility will start:
2. Use the Arrow keys (**← →**) to highlight **Exit** from the top of the screen, and the **Exit** menu will appear.
3. Use the Arrow keys (**↑↓**) to select **Load Setup Defaults**, and press **Enter**.
4. A prompt will appear saying **Load Setup Defaults (Y/N)?** Make sure **YES** is highlighted and press **Enter** to confirm the change.

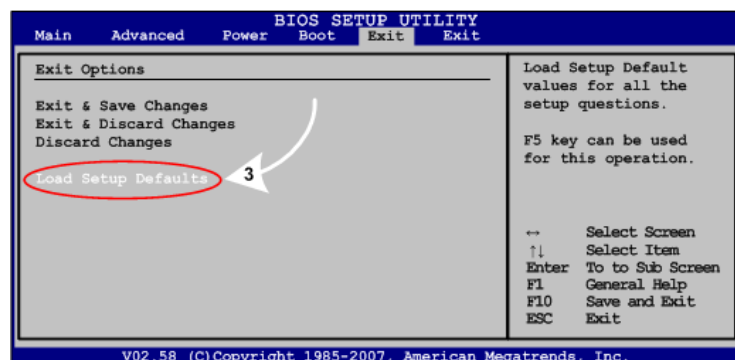


- Use the Arrow keys (← →) to highlight **Main** from the top of the screen, and the **Main** Menu will appear.
- Use the Arrow keys (↑↓) to highlight **System Time**. The hour will be highlighted. Use the + and – keys to set the hour to local time. Press **Tab** to move to the minutes, and set them the same way.

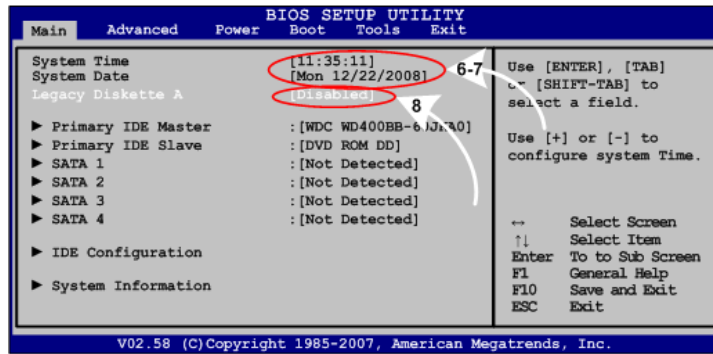


- Use the Arrow keys (↑↓) to highlight **System Date** and set it the same way you set the time.
- Use the Arrow keys (↑↓) to highlight **Legacy Diskette A:** and then use the + and – keys to change the setting to **Disabled**.
- Verify **Primary IDE Master** is the hard disk (WDC WD400BB) and **Primary IDE Slave** is the Sony DVD-ROM.

- Use the Arrow keys (← →) to highlight **Advanced** from the top of the screen, and the **Advanced** menu will appear.
- Use the Arrow keys to highlight **CPU Configuration** and press **Enter**.

The **Configure Advanced CPU Settings** menu will appear.

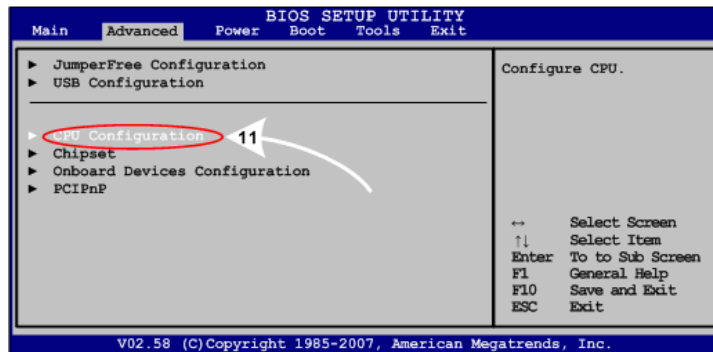


- Use the Arrow keys (↑↓) to highlight **Intel(R) SpeedStep (tm) tech.** and then use the + and – keys to change the setting to **Disabled**.
- Press **Esc** to return to the **Advanced** menu.

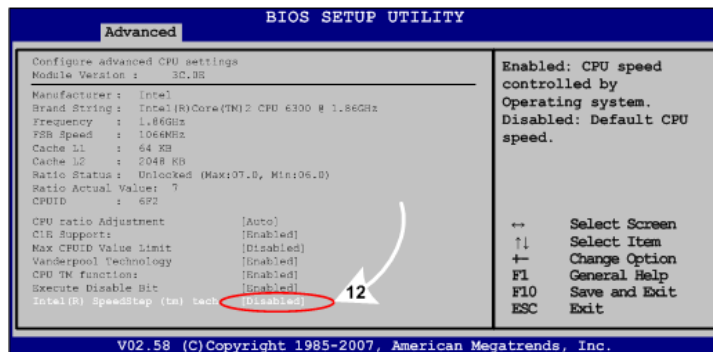


- Use the Arrow keys (← →) to highlight **Power** from the top of the screen, and the **Power** menu will appear.
- Use the Arrow keys to highlight **APM Configuration** and press **Enter**.

The **APM Configuration** menu will appear.

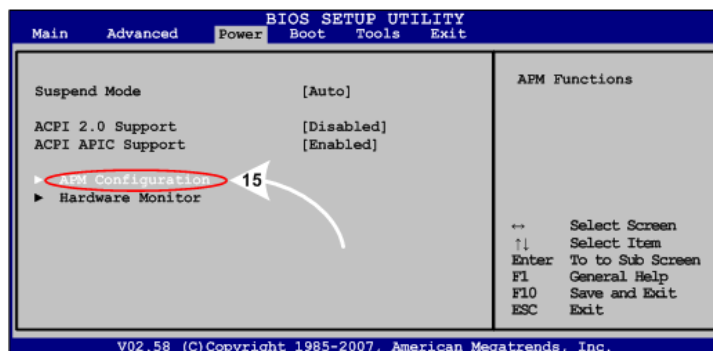


- Use the Arrow keys (↑↓) to highlight **Restore on AC Power Loss** and then use the + and – keys to change the setting to **Power-On**.

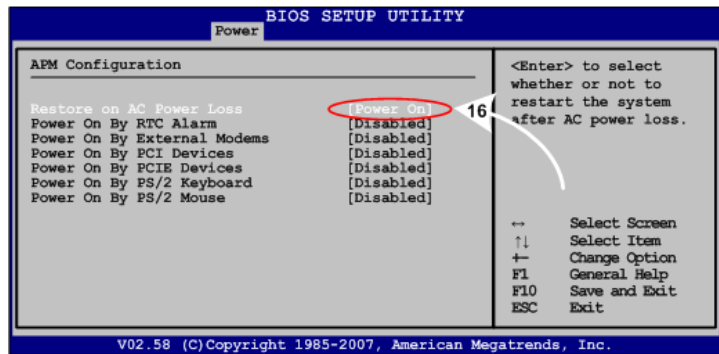

- Press **Esc** to return to the **Power** menu.

Note: It is also recommended to select **Hardware Monitor** from the Power menu and verify **CPU Q-Fan Control** is set to **Disabled**.


- Use the Arrow keys (← →) to highlight **Boot** from the top of the screen, and the **Boot** menu will appear.

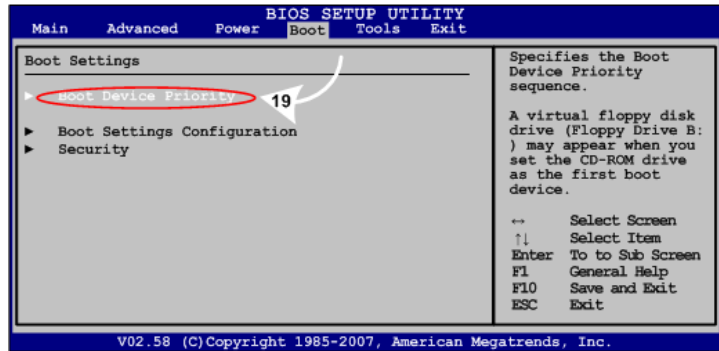

- Use the Arrow keys (↑↓) to highlight **Boot Device Priority** and press **Enter**.

The **Boot Device Priority** menu will appear.

- Use the Arrow keys (↑↓) to highlight **1st Boot Device**, and then use the + and – keys to change the setting to **DVD ROM**.

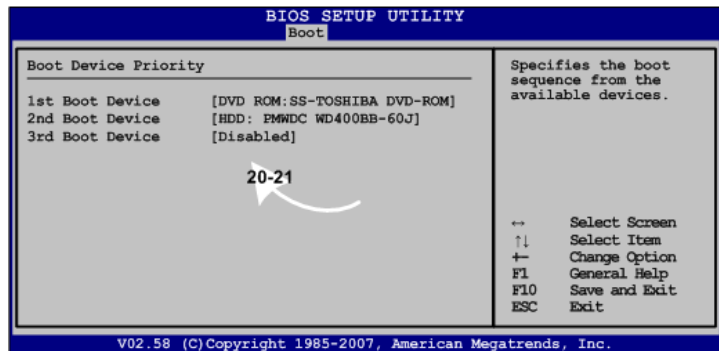


- Do the same step to change **2nd Boot Device** to **HDD**, and **3rd Boot Device** to **Disabled**, as necessary.

- Press **Esc** to return to the **Boot** menu.


- Use the Arrow keys (↑↓) to highlight **Boot Settings Configuration** and press **Enter**.

The **Boot Settings Configuration** menu will appear

- Use the Arrow keys (↑↓) to highlight **Wait for F1 if Error** and then use the + and – keys to change the setting to **Disabled**.

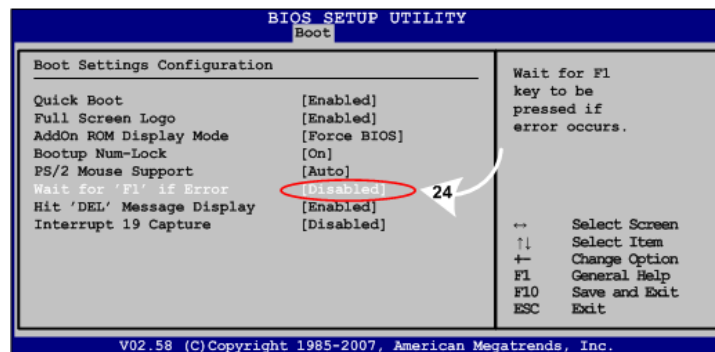

- Now that all settings are correct, press F10. The following prompt will appear:



- Make sure **Ok** is highlighted (use the arrow keys ← → to select, if necessary), and press **Enter** to save the settings and reboot the computer.