
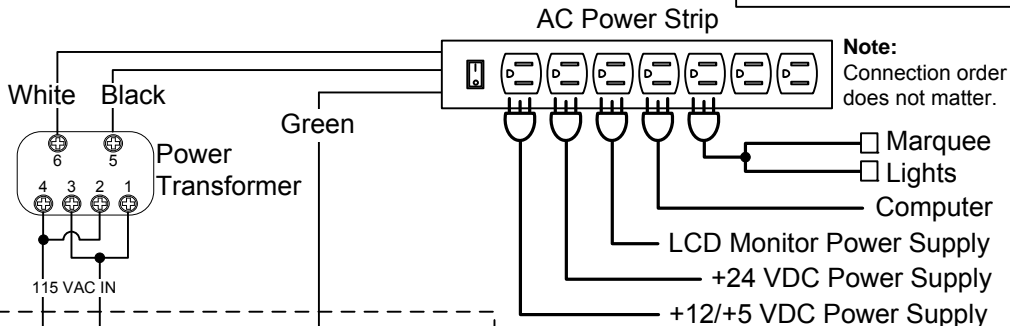



Power Transformer Connection for 230 VAC System



**Note:**  
Connection order does not matter.

- Marquee
- Lights
- Computer
- LCD Monitor Power Supply
- +24 VDC Power Supply
- +12/+5 VDC Power Supply

AC Power Plate

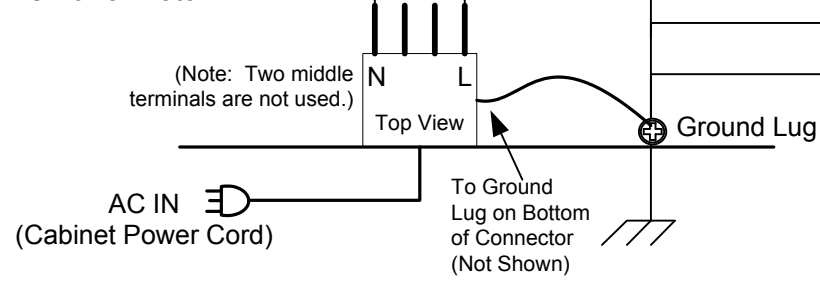


- To Coin Box Ground Lug
- To Monitor Ground Lug

+12/+5 VDC Power Supply (PCBs, Lights, Fan)

Part #: 115-0153-01

+12 VDC to CCFLs Under Seat Assembly

Set Input Voltage to 115 through hole in top.

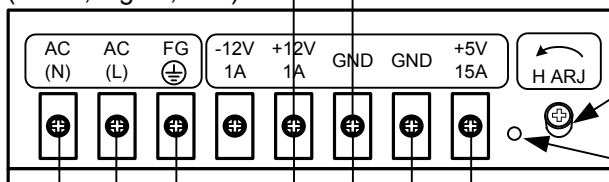


- Voltage Adjustment Pot
- Power ON LED

Part #: 115-0008-01  
To AC Power Strip

White Black Green

+12V GND GND +5V  
(Yellow)(Black)(Black)(Red)

Part of Main Harness  
Part #: 115-0146-01

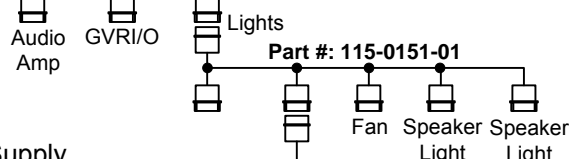

Part #: 115-0151-01

Part #: 115-0165-01


To Floor CCFLs

+24 VDC Steering Power Supply

MAXIMUM CONTINUOUS OUTPUT POWER IS 115W

Power ON LED

Pot

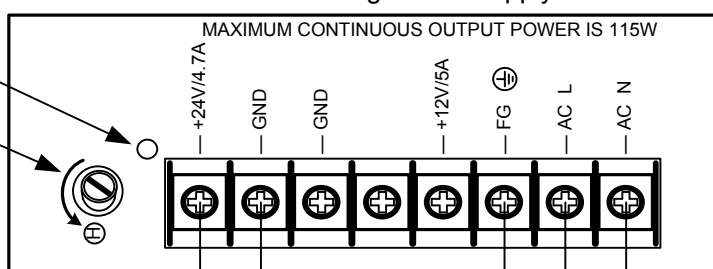

Red Black

Green Black White

Check Input Voltage (115 or 230) through hole in side.

To Force Feedback PCB  
Part #: 115-0007-01

Part #: 115-0008-01  
To AC Power Strip

+24 VDC LCD Monitor Power Supply

**S-240-24**


AC INPUT  
100-120VAC/5.0A  
200-240VAC/2.5A  
50/60Hz

DC OUTPUT +24V 10A


MADE IN TAIWAN

Voltage Adjustment Pot

Power ON LED



+24 VDC Out to LCD Monitor

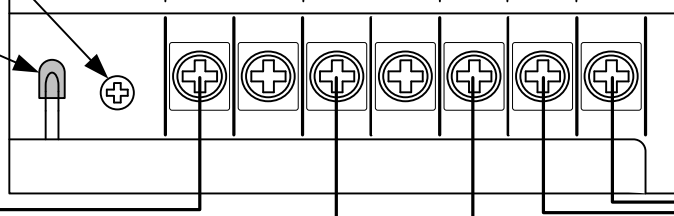

PN: 115-0121-01

**Notes: Wiring Shown for Deluxe Cabinets.**  
Only one marquee light on Standard Cabinets.

To AC Power Strip